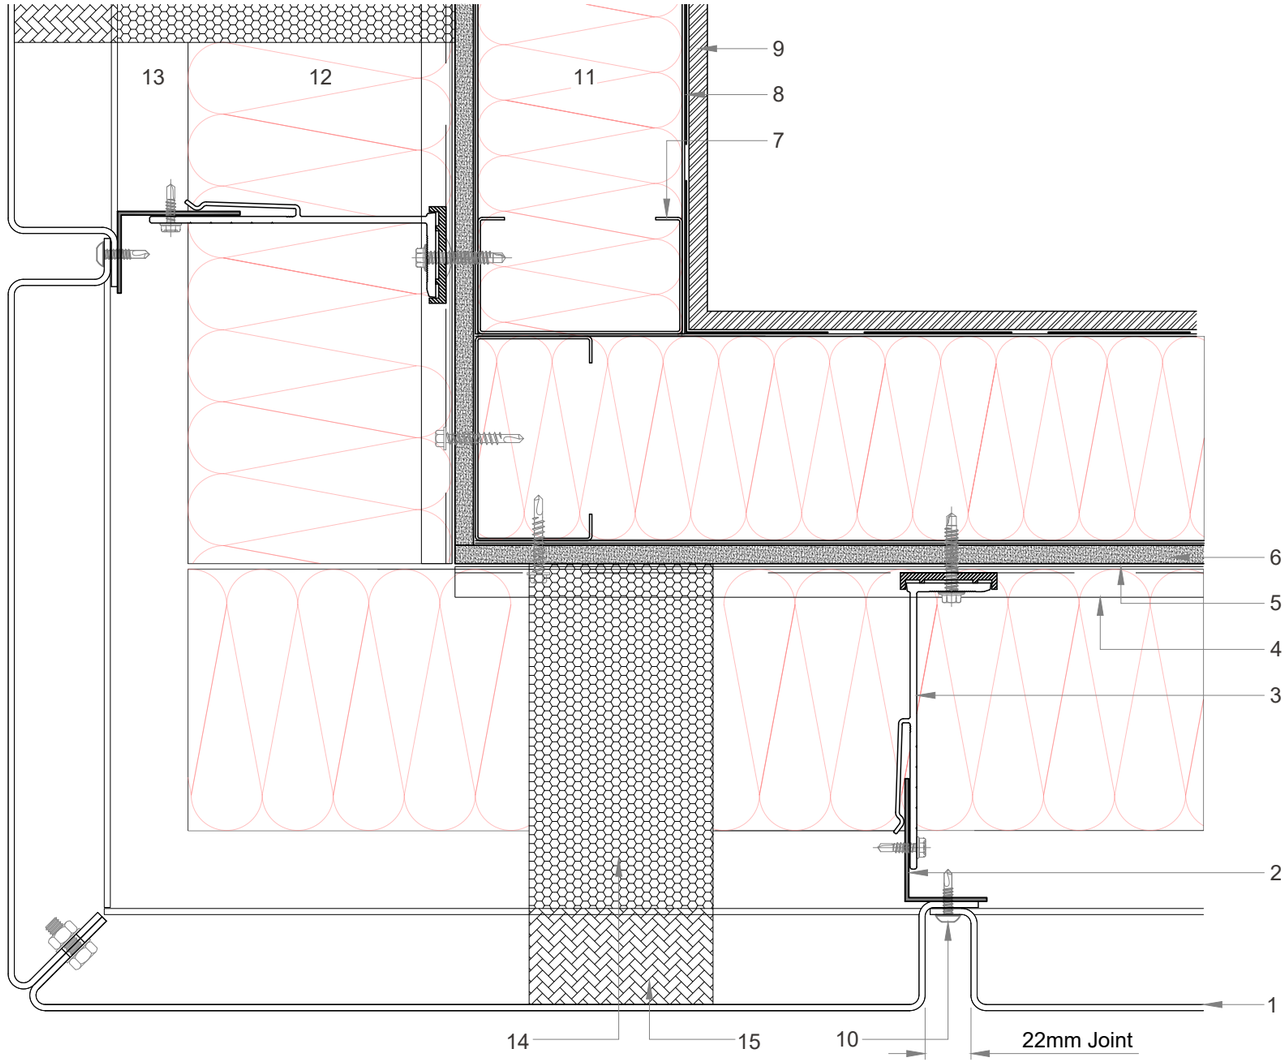


1. Core Joint Fix Cassette Panel
2. RJ Facades EVT II Extruded Aluminium L or T Rail, Secured To Bracket By EJOT-JT4-4-4.8x19 Tek Screws
3. RJ Facades EVT II Helping Hand Bracket With Thermo Pad, Fixed With EJOT-JT4-6-5.5x30 A15 Tek Screws
4. RJ Facades SPH / FPH Load Spreading C-Channel, Fixed With EJOT-JT3-3-6.3x50 S16 Tek Screws
5. Breather Membrane
6. Sheathing Board
7. SFS Frame
8. VCL
9. Internal Finish
10. Panel Fixing - EJOT-JT3-FR-6-5.5x25
11. Full Fill A1 Rated Insulation
12. A1 Rated Rainscreen Insulation Slab
13. Vented Cavity
14. Vertical Close State Cavity Barrier
15. Open State Cavity Insert

Revision	Date	Amendment	Drawn
-	-	-	-

Gordian
1 Gerrard Place
Skelmersdale
Lancashire
WN8 9SU
United Kingdom

Tel No: 01695 667 515
E-mail: enquiries@gordianbuildingsolutions.com

All copyright and design right contained within this document is the property of Gordian Building Solutions and may not be reproduced without the written consent of Gordian Building Solutions.

DO NOT SCALE FROM THIS DRAWING

System: Core Joint Fix

Title: External Corner Detail (Bolted Option)

Section	Structure	Panel Type	Carrier	Fixing Type
Horizontal	SFS	Cassette	L or T Rail	Direct

Drawn By	Drawn Date	Approved By	Approved Date	Scale
DMW	02.09.26	SRG	02.09.26	NTS

Drawing reference no.	Drawing Size	Revision
Joint Fix-08	A3	-