Core©
Conceal Fix Cladding

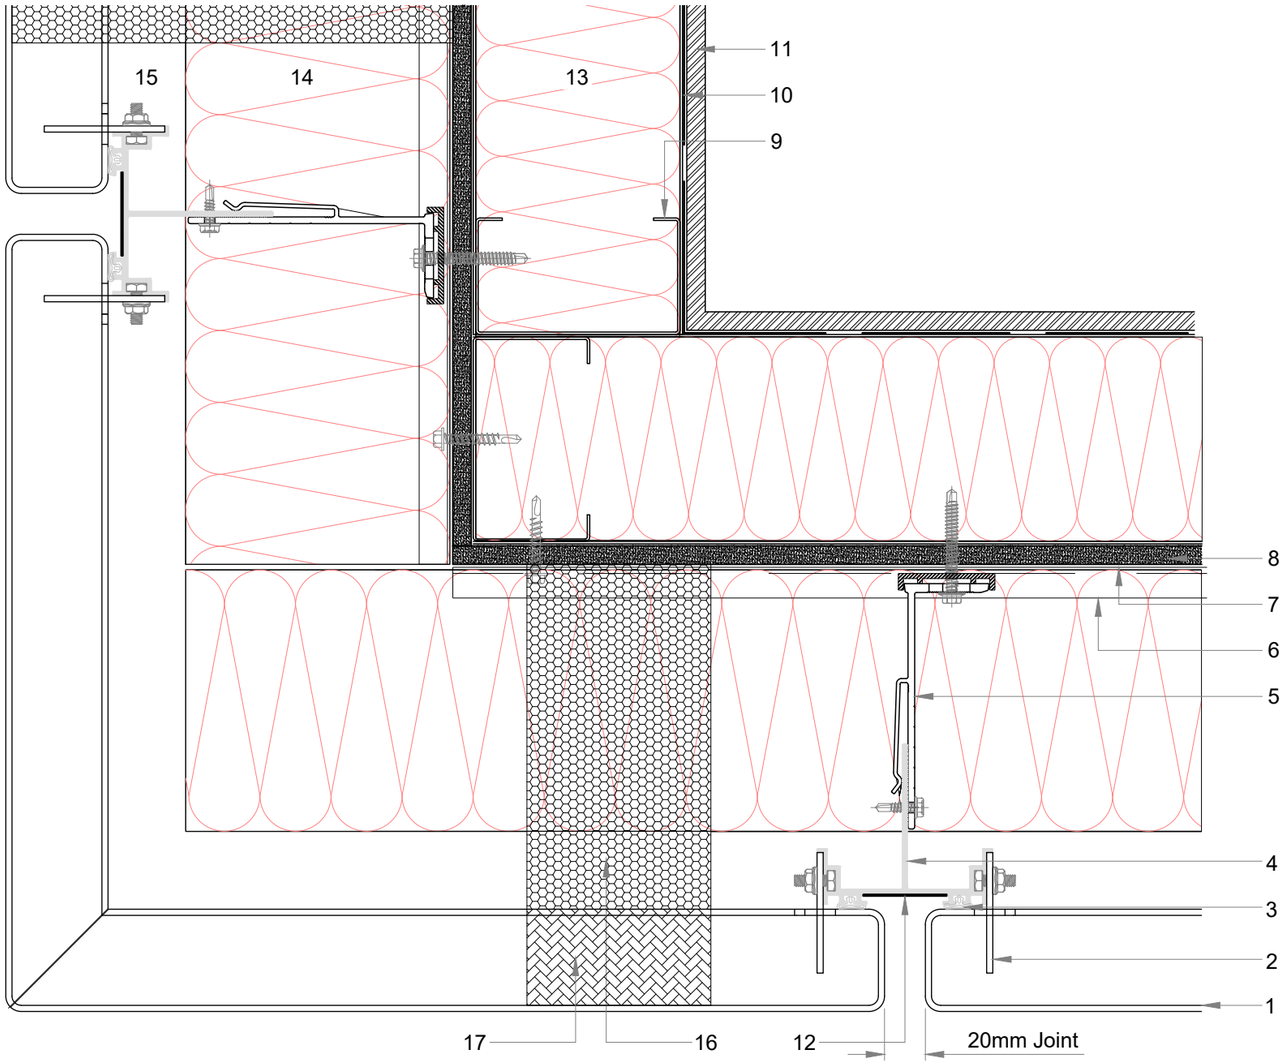

1. Core Secret Fix Cassette Panel
2. RJ Facades Hook On Assembly
3. Weather Gasket
4. RJ Facades SFC Carrier Rail Assembly
5. RJ Facades EVT II Helping Hand Bracket With Thermo Pad, Fixed With EJOT-JT4-6-5.5x30 A15 Tek Screws
6. RJ Facades SPH / FPH Load Spreading C-Channel, Fixed With EJOT-JT3-3-6.3x50 S16 Tek Screws
7. Breather Membrane
8. Sheathing Board
9. SFS Frame
10. VCL
11. Internal Finish
12. SFC Optional Cover Strip
13. Full Fill A1 Insulation Slab
14. A1 Rated Rainscreen Insulation Slab.
15. Vented Cavity
16. Close State Cavity Barrier
17. Open State Cavity Insert

Revision	Date	Amendment	Drawn
-	-	-	-

Gordian
1 Gerrard Place
Skelmersdale
Lancashire
WN8 9SU
United Kingdom

Tel No: 01695 667 515
E-mail: enquiries@gordianbuildingsolutions.com

All copyright and design right contained within this document is the property of Gordian Building Solutions and may not be reproduced without the written consent of Gordian Building Solutions.

DO NOT SCALE FROM THIS DRAWING

System	Core Conceal Fix			
Title	External Corner Detail			
Section: Horizontal	Structure: SFS	Panel Type: Cassette	Carrier: Rail	Fixing Type: Hook
Drawn By: DMW	Drawn Date: 01.09.26	Approved By: SRG	Approved Date: 01.09.26	Scale: NTS
Drawing reference no.: Conceal Fix-06			Drawing Size: A3	Revision: -