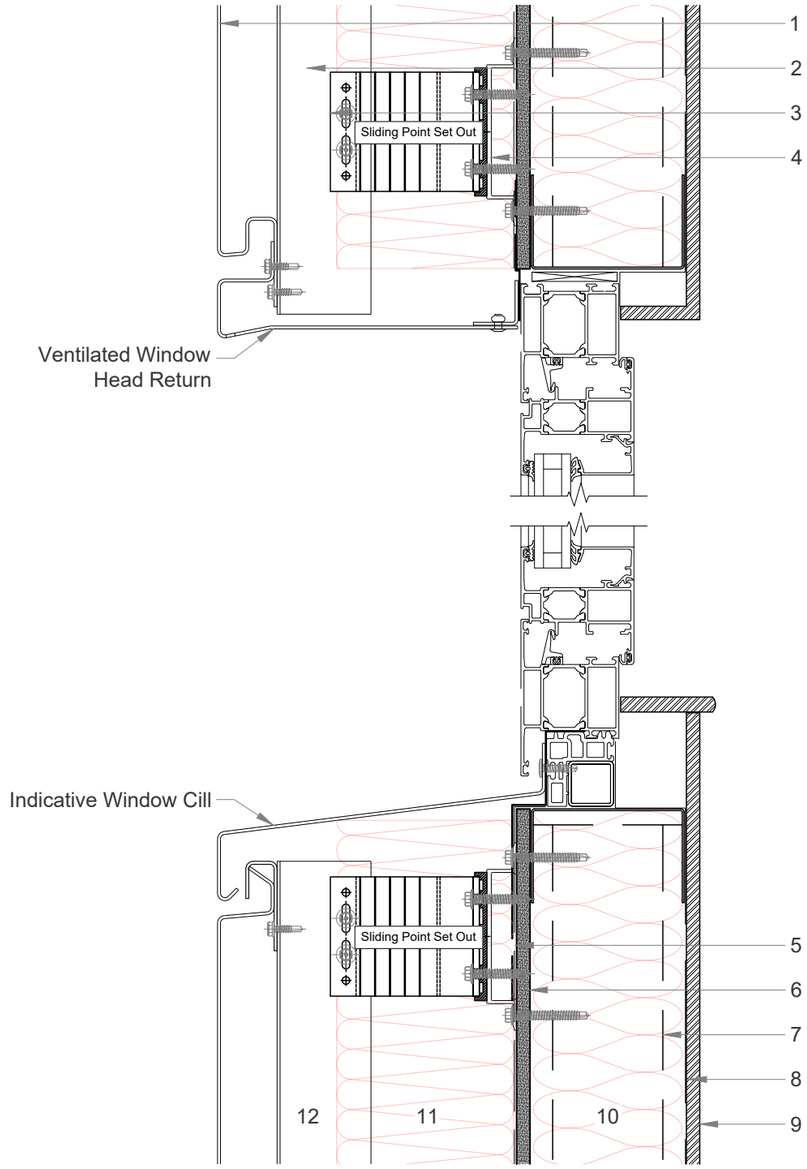


1. Core Interlocking Pressed Plank Panel
2. RJ Facades EVT II Extruded Aluminium L or T Rail, Secured To Bracket By EJOT-JT4-4-4.8x19 Tek Screws
3. RJ Facades EVT II Helping Hand Bracket With Thermo Pad, Fixed With EJOT-JT4-6-5.5x30 A15 Tek Screws
4. RJ Facades Load Spreading Top Hat Fixed With EJOT-JT3-3-6.3x50 S16 Tek Screws
5. Breather Membrane
6. Sheathing Board
7. SFS Frame
8. VCL
9. Internal Finish
10. Full Fill A1 Rated Insulation
11. A1 Rated Rainscreen Insulation Slab
12. Vented Cavity

Revision	Date	Amendment	Drawn
-	-	-	-

Gordian
1 Gerrard Place
Skelmersdale
Lancashire
WN8 9SU
United Kingdom

Tel No: 01695 667 515
E-mail: enquiries@gordianbuildingsolutions.com

All copyright and design right contained within this document is the property of Gordian Building Solutions and may not be reproduced without the written consent of Gordian Building Solutions.

DO NOT SCALE FROM THIS DRAWING

System	Core Interlocking Plank			
Title	Vertically Laid Panel (Window Interface)			
Section: Vertical	Structure: SFS	Panel Type: Plank	Carrier: T Rail	Fixing Type: -
Drawn By: DMW	Drawn Date: 01.09.26	Approved By: SRG	Approved Date: 01.09.26	Scale: 1:4
Drawing reference no.: Interlocking Plank-10			Drawing Size: A3	Revision: -